



## SERIES IEF | INSERTION ELECTROMAGNETIC FLOW TRANSMITTER



-LCD option shown

Shown with A-IEF-VLV-BR  
accessory valve kit

### FEATURES/BENEFITS

- Meet application requirements with field configurable setup displays (-LCD integral option or remote accessory A-IEF-DSP), which accommodate a variety of application configurations with one model through multiple display configurations i.e. pipe size, pipe material, liquid type, analog output, pulse/frequency output, alarm outputs, communication outputs, damping, and calibration factor
- Maintain system efficiency with high performance accuracy that is maintained through changes in temperature, density or viscosity
- Quick and easy ordering and set up with Setup Wizard and installation tool that are simple to use and allow for precise installation
- Save time with accessory setup kit A-IEF-KIT that ensures exact installation application depth with included thickness gage and measuring tape
- Reduced costs, long product life, and minimal maintenance requirements with no moving parts to wear or break and electrodes that discourage fouling
- Minimize installation costs with isolation valve accessory options to allow for installation in operational systems via hot-tap kit or easy removal without system downtime
- Required documents included with NIST traceable pass/fail verification certificate included standard for Carbon Steel Schedule 40 pipes sized 4" (102 mm), 6" (150 mm), 8" (200 mm)

### APPLICATIONS

- Boiler feed water
- Chilled water
- Open and closed loop condenser water
- Irrigation system
- Municipal water distribution
- Process and coolant flow
- Ground water remediation
- Chemical processing
- Pump protection
- Wastewater
- Mining

### DESCRIPTION

The **Series IEF Insertion Electromagnetic Flow Transmitter** is an adjustable insertion flowmeter featuring electromagnetic technology that accurately and reliably measures fluid velocity in addition to providing several continuous signal outputs. This series is specifically designed to offer superior performance paired with simple installation and use. One unit is adjustable to fit pipe sizes from 4 to 36" (100 to 900 mm), and offers several output options including selectable BACnet MS/TP or Modbus® RTU communications protocol over 2-wire RS-485 in addition to the standard analog, frequency and alarm outputs.

## SPECIFICATIONS

|                                                          |                                                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Service</b>                                           | Compatible clean or dirty non coating, conductive liquids.                                                                                                                                                                                                                                             |
| <b>Range</b>                                             | 0 to 20 ft/s (0 to 6 m/s).*                                                                                                                                                                                                                                                                            |
| <b>Wetted Materials</b>                                  | Body shaft/fitting: 316 SS; Electrodes: 316 SS; Electrode cap: Polymer/polystyrene; O-ring: Silicone.                                                                                                                                                                                                  |
| <b>Accuracy</b>                                          | High accuracy units: $\pm 0.5\%$ of reading at calibrated velocity; $\pm 1\%$ of reading from 2 to 20 ft/s (0.6 to 6 m/s); $\pm 0.02$ ft/s ( $\pm 0.006$ m/s) at $< 2$ ft/s (0.6 m/s);<br>Standard accuracy units: $\pm 1\%$ FS.                                                                       |
| <b>Temperature Limits</b>                                | Ambient: -20 to 160°F (-29 to 71°C); Process: 15 to 250°F (121°C); Storage: -40 to 185°F (-40 to 85°C).                                                                                                                                                                                                |
| <b>Process Connection</b>                                | 1" NPT or BSPT with accessory full port ball valve options.                                                                                                                                                                                                                                            |
| <b>Pressure Limits</b>                                   | 400 psi (27.6 bar) @ 100° F (37.8°C).                                                                                                                                                                                                                                                                  |
| <b>Pressure Drop</b>                                     | $< 0.1$ psi at 12 ft/s in 4" (100 mm) and larger pipe.                                                                                                                                                                                                                                                 |
| <b>Outputs</b>                                           | (1) Analog: 4-20 mA, 0-5 V, 0-10 V or 2-10 V (display selectable);<br>(1) Pulse/Frequency: 0-15 V peak pulse, 0 to 500 Hz or scalable pulse output (display selectable);<br>(2) Alarm: (1) Empty pipe detection or minimum/maximum velocity, (display selectable); (1) Reverse flow output indication. |
| <b>Power Requirements</b>                                | 12-42.4 VDC, 0.25 A @ 24 VDC; 12-36 VAC.                                                                                                                                                                                                                                                               |
| <b>Electrical Connection</b>                             | Removable terminal blocks, model selectable 1/2" female NPT conduit connection, PG 16 gland or PG 16 gland with (2) 10 ft (3 m) 9 conductor 22 AWG plenum rated cables, accessory cable lengths up to 200 ft (61 m) optional.                                                                          |
| <b>Display (-LCD option)</b>                             | 2" ( 5.08 cm) x 2" (5.08 cm) graphic LCD with backlight.                                                                                                                                                                                                                                               |
| <b>Conductivity</b>                                      | $> 20$ microsiemens                                                                                                                                                                                                                                                                                    |
| <b>Enclosure Material</b>                                | Powder coated die cast aluminum.                                                                                                                                                                                                                                                                       |
| <b>Enclosure Ratings</b>                                 | NEMA 6P (IP68) (Non display models); NEMA 4X (IP66) (-LCD option).                                                                                                                                                                                                                                     |
| <b>Compliance</b>                                        | BTL, CE, NSF/ANSI 61 and 372 pending.                                                                                                                                                                                                                                                                  |
| *For max flowrates $> 10$ ft/s (3 m/s) order option -CC. |                                                                                                                                                                                                                                                                                                        |


## COMMUNICATIONS SPECIFICATIONS (-COM OPTION)

|                             |                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------|
| <b>Type</b>                 | BACnet MS/TP or Modbus® RTU communication protocol (default disabled, display selectable). |
| <b>Supported Baud Rates</b> | 9600, 19200, 38400, 57600, 76800, or 115200 bps (display selectable).                      |
| <b>Device Load</b>          | 1/8 unit load.                                                                             |


## ADDITIONAL SPECIFICATIONS

|                                                                         |                                                                                                                            |
|-------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Applicable Pipe Material</b>                                         | Most popular plastic and metal pipes; i.e. carbon steel, SS, copper, UPVC/PVDF, galvanized steel, mild steel, and brass.** |
| <b>Applicable Pipe Size</b>                                             | 4-36" (100 to 900 mm), model dependent. See model chart.                                                                   |
| <b>Diameter Length Requirements</b>                                     | $> 10$ upstream, $> 5$ downstream.                                                                                         |
| <b>Glycol</b>                                                           | 0 to 100% display selectable.                                                                                              |
| **Brass fittings and pipe are not to be used with NSF certified models. |                                                                                                                            |

DIMENSIONS

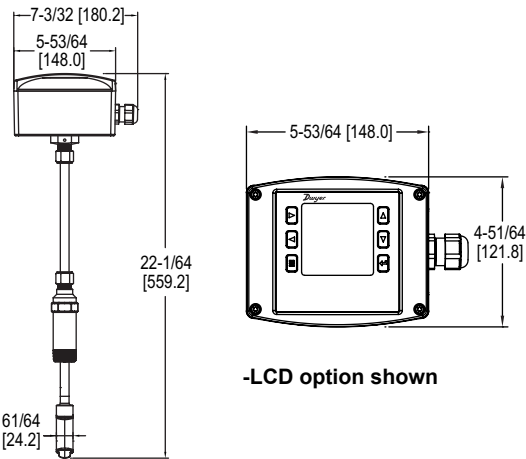

WIRING DIAGRAM

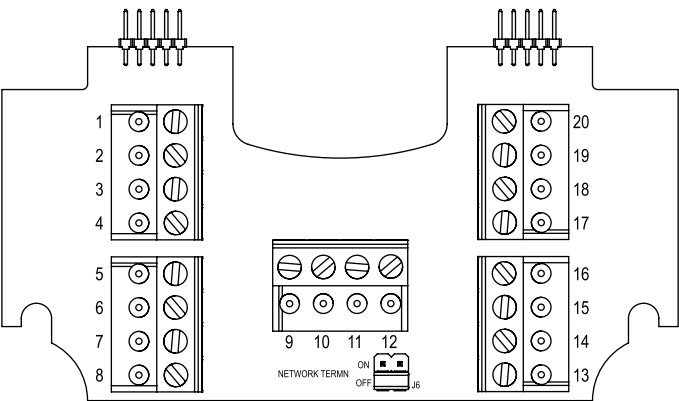


| WIRING DIAGRAM                  |            |            |                                  |                                                |
|---------------------------------|------------|------------|----------------------------------|------------------------------------------------|
| Cable*                          | Terminal # | Wire Color | Description                      | Note                                           |
| A                               | 1          | Red        | Power Supply Positive            | Connect to +24 VDC or VAC transformer          |
| A                               | 2          | Black      | Power Supply Common              | Connect to 24 VDC/VAC common                   |
| A                               | 13         | Shield     | -                                | If used - Application Dependant                |
| B                               | 14         | Shield     | -                                | If used - Application Dependant                |
| External                        | -          | -          | Earth/Chassis Ground             | -                                              |
| Analog Current Output           |            |            |                                  |                                                |
| B                               | 3          | Brown      | (+) Analog current output        | 4-20 mA process output                         |
| B                               | 4          | Blue       | (-) Analog output common         | Current output common                          |
| Analog Voltage Output           |            |            |                                  |                                                |
| B                               | 5          | Green      | (+) Analog voltage output        | May be configured; 0-10 V, 0-5 V, 2-10 V, etc. |
| B                               | 6          | White      | (-) Analog output common         | Voltage output common                          |
| Frequency Output                |            |            |                                  |                                                |
| B                               | 8          | Violet     | (+) Frequency output             | 0 to 500 Hz output (@ 0/15 VDC output level)   |
| B                               | 7          | Grey       | (-) Analog output common         | Frequency output common                        |
| RS-485 Communication (optional) |            |            |                                  |                                                |
| B                               | 11,12      | Orange     | RS-485 (+)                       | On board short for daisy chain connection      |
| B                               | 9,10       | Yellow     | RS-485 (-)                       | On board short for daisy chain connection      |
| Reverse Flow                    |            |            |                                  |                                                |
| A                               | 15         | Brown      | Isolated solid state output N.O. | 50 V AC/VDC @ 100 mA maximum                   |
| A                               | 16         | Blue       | Isolated solid state output N.O. | 50 V AC/VDC @ 100 mA maximum                   |
| Alarm                           |            |            |                                  |                                                |
| A                               | 17         | Green      | Isolated solid state output N.O. | 50 V AC/VDC @ 100 mA maximum                   |
| A                               | 18         | White      | Isolated solid state output N.O. | 50 V AC/VDC @ 100 mA maximum                   |
| Pulse                           |            |            |                                  |                                                |
| A                               | 19         | Orange     | Isolated solid state output N.O. | 50 V AC/VDC @ 100 mA maximum                   |
| A                               | 20         | Yellow     | Isolated solid state output N.O. | 50 V AC/VDC @ 100 mA maximum                   |
| No Connection                   |            |            |                                  |                                                |
| B                               | -          | Red        | Do not connect                   | -                                              |
| B                               | -          | Black      | Do not connect                   | -                                              |
| A                               | -          | Violet     | Do not connect                   | -                                              |
| A                               | -          | Grey       | Do not connect                   | -                                              |

\*Supplied cables - shown

## HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code.

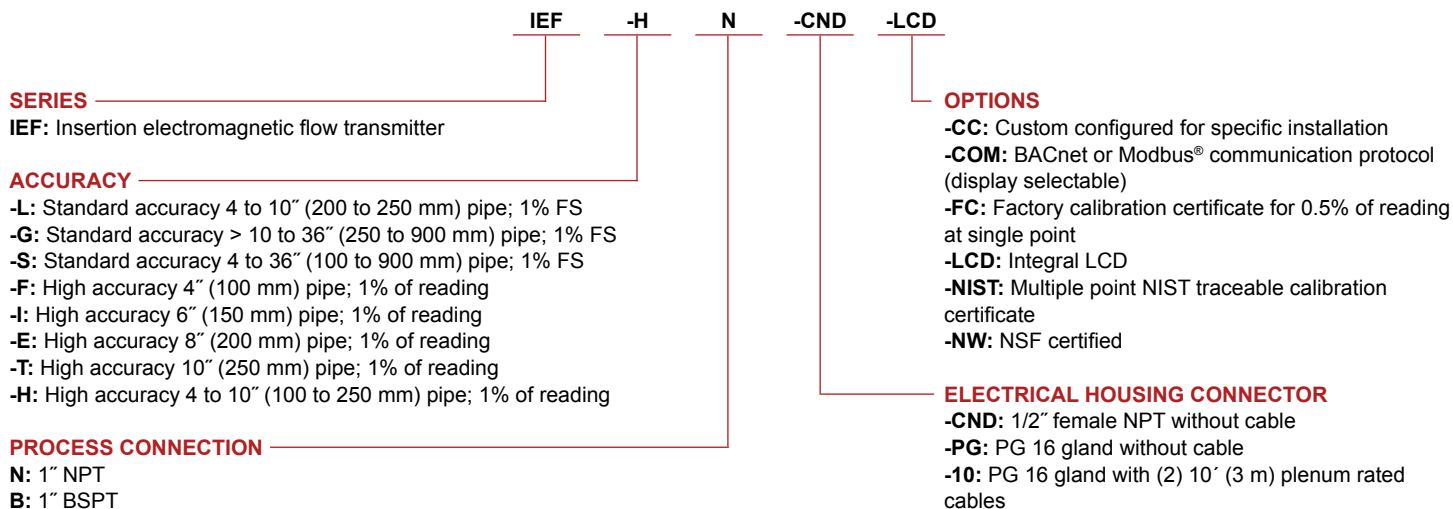

**Note:** For maximum performance select -LCD option or setup display accessory.

## ACCESSORIES

| Model                                                                                                        | Description                                                                                       |
|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>A-IEF-CBL-50</b>                                                                                          | Plenum rated cable 50 ft (15.2 m)                                                                 |
| <b>A-IEF-KIT</b>                                                                                             | Setup kit (includes setup display, thickness gage and measuring tape) and universal power adapter |
| <b>A-IEF-DSP</b>                                                                                             | Setup display                                                                                     |
| <b>A-IEF-PA</b>                                                                                              | AC wall adapter                                                                                   |
| <b>A-IEF-VLV-BR</b>                                                                                          | 1-1/4" full port isolation valve brass kit**                                                      |
| <b>A-IEF-VLV-SS</b>                                                                                          | 1-1/4" full port isolation valve 316 SS kit                                                       |
| **Brass fittings and pipe are not to be used with NSF Certified models. Brass valves are non-RoHS compliant. |                                                                                                   |



**electro-mation**  
... Luftmesstechnik

ELECTRO-MATION GmbH  
Münsterstr. 23-25  
22529 Hamburg  
GERMANY

Tel. 040 / 850-2320  
Fax 040 / 850-4114  
info@electro-mation.de  
www.electro-mation.de