



Industrial thermocouple temperature sensor with aluminium connection head and with offset fitting

TBRD K/ TBRD KI – TBRDD K / TBRDD KI

- Thermocouple types T, J, K and N.
- Measuring range from **-40°C to +1000°C**
- Mounting with offset fitting

Stainless steel contact tip max 400°C part numbers

To order, just add the codes to complete the part number.

| Duplex | Type | Effective length diameter (mm) | Effective length (mm) | Fitting | Thread unit | Height adjustment diameter (mm) | Height adjustment length (mm) |
|--------|------|--------------------------------|-----------------------|---------|-------------|---------------------------------|-------------------------------|
| - | T | 6 | 50 | | | 6 | 50 |
| D | J | 8 | 100 | 12 | G | 8 | 100 |
| | K | 10 | 150 | 14 | NPT | 10 | 150 |
| | N | * | 200 | * | | 12 | 200 |

TBRD [] - [] - [] - [] - [] - [] - [] - []

*other on request

Example : TBRD-T-6-100-12-G-6-50

Model : Thermocouple sensor type T at head with contact tip of 100 mm effective length and 6 mm Ø and height adjustment length of 50 mm in 6 mm Ø . Contact tip with ½ G compression fitting.

Lined contact tip max 1000°C part numbers

| Duplex | Type | Effective length diameter (mm) | Effective length (mm) | Fitting | Thread unit | Height adjustment diameter (mm) | Height adjustment length (mm) |
|--------|------|--------------------------------|-----------------------|---------|-------------|---------------------------------|-------------------------------|
| - | TI | 3 | 150 | | | 6 | 50 |
| D | JI | 4,5 | 300 | 12 | G | 8 | 100 |
| | KI | 6 | 500 | 14 | NPT | 10 | 150 |
| | NI | 8 | * | * | | 12 | 200 |


TBRD [] - [] - [] - [] - [] - [] - [] - []

*other on request

Example : TBRD-KI-6-150-12-G-6-50

Model : Thermocouple sensor type K in inconel at head with contact tip of 150 mm effective length and 6 mm Ø and height adjustment length of 50 mm in 6 mm Ø . Contact tip with ½ G compression fitting.

Dimensions

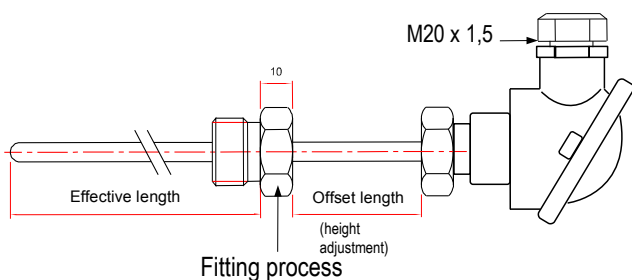

Technical features

Working temperature.....For **TBK** series
 from -40°C to +350°C for Tc T
 from -40°C to +400°C for J, K et N

For **TBKI** series
 from -40°C to +350°C for Tc T
 from -40°C to +750°C for Tc J
 from -40°C to +1000°C for Tc K and Tc N

Recommended temperature.....According to contact tip Ø in inconel 600
 from 0.5 to 1 mm Ø : up to 300°C
 from 1.5 to 2 mm Ø : up to 750°C
 3 mm Ø : up to 900°C
 from 4.5 to 8 mm Ø : up to 1000°C



Accuracy* for class 1.....See "Tolerances" table

Mounting of welding.....Insulated or to earth hot welding
 Single pair or 2x2 wires multipair mounting.

Contact tip.....For **Effective length**
 Stainless steel 316 L or lined inconel 600 for I series
 Compacted magnesia and stainless steel 316 L for TBRDK-TBRDDK series

For **Offset length**
 Stainless steel 316 L

Compression fitting.....Stainless steel 316 L

Thread.....Fitting ½", ¼" G or NPT plug

Electrical connection.....Ceramic block junction 2 or 4 contacts.
 Transmitter as option.

Connection head.....Aluminium alloy (max 120°C)
 Cable gland : M20/150
 IP 65 protection.

Storage temperature.....from -20°C to +80°C

* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.

Tolerances* of the probe

As per IEC 584-3 norm

| TC | MEASURING RANGE CLASS 1 | TOLERANCE |
|----|-------------------------|---|
| T | From -40°C to +350°C | From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$ |
| J | From -40°C to +750°C | From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$ |
| K | From -40°C to +1000°C | From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$ |
| N | From -40°C to +1000°C | From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$ |


* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.

Most common thermocouple types

| THERMOCOUPLE TYPE | + CONDUCTOR | - CONDUCTOR | COLOR OF COMPENSATING CABLE |
|-------------------|---|----------------------------------|----------------------------------|
| K | Nickel-Chrome 10% | Nickel-Aluminium 5% -Silicium | Ext. color + = GREEN, - = WHITE |
| T | Copper | Copper-Nickel | Ext. color + = BROWN, - = WHITE |
| J | Iron | Copper-Nickel | Ext. color + = BLACK, - = WHITE |
| N | Nickel 84,4% Chromium 14,2% Silicium 1,4% | Nickel 95,6% Silicium 4,4% | Ext. color + = PINK, - = WHITE |
| R | Platinum-Rhodium 13% | Platinum | Ext. color + = ORANGE, - = WHITE |
| S | Platinum-Rhodium 10% | Platinum | Ext. color + = ORANGE, - = WHITE |
| B | Platinum-Rhodium 30% | Platinum-Rhodium 6% | Ext. color + = GREY, - = WHITE |

Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector



- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters



electro-mation
... Luftmesstechnik

ELECTRO-MATION GmbH
Münsterstr. 23-25
22529 Hamburg
GERMANY

Tel. 040 / 850-2320
Fax 040/ 850-4114
info@electro-mation.de
www.electro-mation.de